
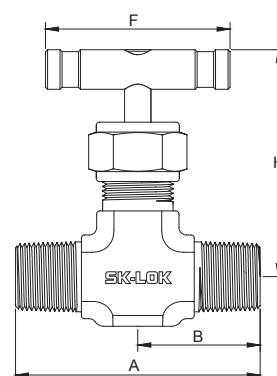




**JZTC1 Male Straight Needle Valve / High Pressure SS 1/4 Tube Connection Metering Male Thread Needle Control Valve
/ Forged Integral Bonnet Straight Body / 6000 Psi Instrumentation Male Thread**



-JZTC1 Male Straight Needle Valve

Order information	End Connection	Orifice		Flow coefficient Cv	A		B		H		F	
		(in)	(mm)		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
-JZTC1-LWM-2	NPT1/8	0.080	2.0	0.09	1.69	43.0	0.85	21.5	1.58	40.2	1.75	44.4
-JZTC1-LWM-4	NPT1/4	0.125	3.2	0.21	1.89	48.0	0.94	24.0	1.66	42.2	1.75	44.4
-JZTC1-LWM-6	NPT3/8	0.250	6.4	0.73	2.50	63.5	1.25	31.7	2.31	58.7	2.50	63.5
-JZTC1-LWM-8	NPT1/2	0.250	6.4	0.73	2.50	63.5	1.25	31.7	2.31	58.7	2.50	63.5
-JZTC1-LWM-R2	BSPT1/8	0.080	2.0	0.09	1.69	43.0	0.85	21.5	1.58	40.2	1.75	44.4
-JZTC1-LWM-R4	BSPT1/4	0.125	3.2	0.21	1.89	48.0	0.94	24.0	1.66	42.2	1.75	44.4
-JZTC1-LWM-R6	BSPT3/8	0.250	6.4	0.73	2.50	63.5	1.25	31.7	2.31	58.7	2.50	63.5
-JZTC1-LWM-R8	BSPT1/2	0.250	6.4	0.73	2.50	63.5	1.25	31.7	2.31	58.7	2.50	63.5