
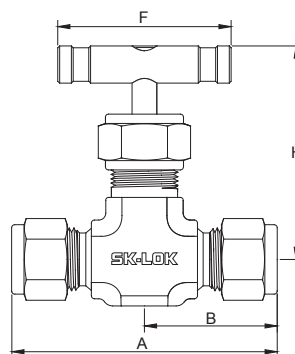


**JZTC1 Straight Needle Valve with Ferrule / 6000 Psi High Pressure /
Double Ferrule OD Tube Fitting / Flow Control Valve / Two Ferrule Adjustable Small Needle Valve**

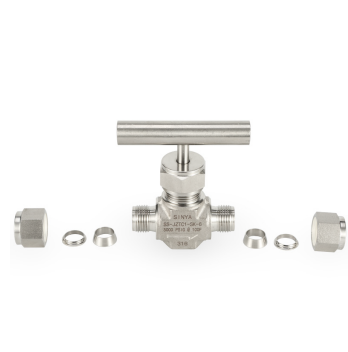

-JZTC1 Straight Needle valve with ferrule

Order information	End Connection		Orifice		Flow coefficient Cv	A		B		H		F	
	(in)	(mm)	(in)	(mm)		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
-JZTC1-SK-2	1/8	3.17	0.080	2.0	0.09	1.89	48.0	0.94	24.0	1.58	40.2	1.75	44.4
-JZTC1-SK-4	1/4	6.35	0.125	3.2	0.21	2.46	62.5	1.23	31.2	1.66	42.2	1.75	44.4
-JZTC1-SK-6	3/8	9.52	0.250	6.4	0.73	3.08	78.2	1.54	39.1	2.31	58.7	2.50	63.5
-JZTC1-SK-8	1/2	12.70	0.250	6.4	0.73	3.30	83.8	1.65	41.9	2.31	58.7	2.50	63.5
-JZTC1-SK-12	3/4	19.05	0.250	6.4	0.73	3.39	86.0	1.69	43.0	2.31	58.7	2.50	63.5
-JZTC1-SK-3mm	0.118	3.0	0.080	2.0	0.09	1.89	48.0	0.94	24.0	1.58	40.2	1.75	44.4
-JZTC1-SK-6mm	0.236	6.0	0.125	3.2	0.21	2.36	60.0	1.18	30.0	1.66	42.2	1.75	44.4
-JZTC1-SK-8mm	0.315	8.0	0.125	3.2	0.21	2.46	62.5	1.23	31.2	1.82	46.2	1.75	44.4
-JZTC1-SK-10mm	0.374	10.0	0.250	6.4	0.73	3.08	78.2	1.54	39.1	2.31	58.7	2.50	63.5
-JZTC1-SK-12mm	0.472	12.0	0.250	6.4	0.73	3.30	83.8	1.65	41.9	2.31	58.7	2.50	63.5
-JZTC1-SK-14mm	0.551	14.0	0.250	6.4	0.73	3.30	83.8	1.65	41.9	2.31	58.7	2.50	63.5
-JZTC1-SK-18mm	0.709	18.0	0.250	6.4	0.73	3.39	86.0	1.69	43.0	2.31	58.7	2.50	63.5